PROCEEDINGS

The First International Conference on Fluid Machinery and Automation Systems 2018





PROCEEDINGS

The First International Conference on Fluid Machinery and Automation Systems 2018

ICFMAS2018

ICFMAS2018



Organized by
VIETNAM FLUID POWER ASSOCIATION
and
HANOI UNIVERSITY OF SCIENCE AND TECHNOLOGY

BACH KHOA PUBLISHING HOUSE





PROCEEDINGS

The First International Conference on Fluid Machinery and Automation Systems 2018

ICFMAS2018

October 27 – 28, 2018 Hanoi, Vietnam

Organized by
VIETNAM FLUID POWER ASSOCIATION
and
HANOI UNIVERSITY OF SCIENCE AND TECHNOLOGY

BACH KHOA PUBLISHING HOUSE

Organizers



Vietnam Fluid Power Association



Hanoi University of Science and Technology

Sponsors



Ho Chi Minh City University of Technology



Nong Lam University – Ho Chi Minh City



Ho Chi Minh City University of Technology and Education



Research Institute of Agricultural Machinery





HaiDuong Pump Manufacturing Joint Stock Company



Advanced Industry and Education Equipment Company Limited



Nam Hai Engineering Company

Contents

| PREFACE |
|---|
| Conference Informationii |
| The Dynamic Analysis and Control of Hydraulic Machine System and Industrial Robotic Manipulators |
| Aerodynamic Performances of a Transonic Axial Compressor with Rotor Hub Fillet Hoang-Tung Vu, Dinh-Quy Vu, Cong-Truong Din |
| Vertical Axis Wind Turbine with Pivoting Blades – A New Study of Vertical Axis WindTurbine13 |
| Nguyen Van Khanh, Le Danh Lie |
| The Coefficient of Wind Power Utilization of Vertical Axis Wind Turbine with Pivoting Blades |
| Le Danh Lien, Nguyen Van Khani |
| Design and Optimization of a Wind Turbine Blade Working at Low Wind Speeds22 Nguyen Cong Hao, Nguyen The Mich, Tran Van Trai |
| Relationship of Geometric Parameters and Kinetic to Characteristics of Wind Turbine Works at Low Wind Speed29 |
| Nguyen Cong Hao, Nguyen The Mich, Tran Van Trai |
| Numerical Simulation and Testing of a Two-boby Heaving Wave Energy Converter38 Phung Van Ngoc, Nguyen The Mich, Dang The Ba, Chu Dinh De |
| Effects of Mesh on the Simulation of the 5.5 kW Centrifugal Fan of the Dong Tam Ltd42 |
| Nguyen Ngoc Hoang Quan, Ngo Khanh Hiel |
| Propeller Simulation in Open-water Condition with SnappyHexMesh/OpenFOAM Mesh Generator5 |
| Le Van Long, Mai Ngoc Luan, Ngo Khanh Hiel |
| Model Order Reduction for Highly Non-linear and Stiff Convection-Diffusion-Reaction Flow Problem57 Van Bo Nguyen, and The Mich Nguye |
| van bo Nguyen, and The Mich Nguyen |
| Robust Multi-Loop PID Controller Design for Multivariable Process with Time Delay 64 Phan Tan Hai, Truong Nguyen Luan Vo |





| Studying Hydraulic Regenerative Braking System on the Dump Truck |
|---|
| Using CFD to Investigate Effect of Rudder on Propeller's Hydrodynamic Characteristics |
| Nguyen Chi Cong, Luong Ngoc Loi, Ngo Van He, Vu Van Duy, Pham Ky Quang |
| A Novel Design and Performance Analysis of Mini Water Turbine-Generator for Portable Applications Using CFD with Experimental Validation83 **Anh Dung Hoang, Chang-Jo Yang, Manh Hung Nguyen, Hong Ha Tran |
| Evaluation of Performance and Wake Characteristics of Two-Bladed Tidal Stream Turbine Using Numerical Method |
| Nguyen Manh Hung, Tran Hong Ha, Hoang Anh Dung, Changjo Yang |
| The Application of DNS for the Research of the Appearance and Propagation of Nonstationary Disturbance Mach Wave |
| The Application of DNS for Investigation of Laminar-turbulent Transition by Tollmien-Schlichting Wave in the Supersonic Boundary Layer |
| To Suggest the Two-pitch Propeller Uses for Fishing Ships Operating in VietNam's Ocean |
| Nguyen Chi Cong, Luong Ngoc Loi, Ngo Van He, Vu Vun Duy, Pham Ky Quang |
| A New Concept of Savonius Turbine to Improve the Power Coefficient115 Mich Nguyen The, Van-Thuan Truong, Trong-Hiep Nguyen, Truong V. Vu |
| Researching and Building Mathematical Models in order to Calculate and Design the Pneumatic Pressure Stabilizer Automatic Valve119 |
| Tang Xuan Long |
| Influences of Inlet Configuration on Flow Hydrokinetic Behavior in GLCC Separator |
| Le Van Sy, Dang Thuc Van |
| Calculation of Thermodynamic Parameters of High Pressure Turbine Stage of DR 76 Engine Based on Geometric Parameters |
| Vu Duc Manh, Nguyen Trung Kien, Dao Trong Thang |





| A Rapid Object-Oriented Process to Develop Controllers for Autonomous Underwater Vehicles |
|---|
| Ngo Van Hien, Pham Gia Diem |
| A Hierarchical Implementation Model to Realize Cooperative Controllers of AUS-MAUVs147 |
| Nguyen Son Tung, Ngo Van Hier |
| Optimal Control of Power Flow in Hybrid Wind-diesel System Applied to Electrical System in Phu Quy Island153 |
| Thang Diep-Thanh, Quang Nguyen-Phung, Huy Nguyen-Duo |
| A Multi-Fidelity Model to Predict the Performance of Torpedo Propellers160 **Nguyen Anh Tuan, Vu Thanh Trung, Bui Duy Thinh |
| An Approach to Study the Airflow over 3D Objects by the Vortex-lattice Method164 Pham Thanh Dong, Nguyen Anh Tuan, Pham Vu Uy |
| Numerical Method to Study Helicopter Main Rotor-fuselage Aerodynamic Interaction |
| Pham Thanh Dong, Nguyen Anh Tuan, Dang Ngoc Thanh, Pham Vu Uy |
| Model of Cascade Reservoirs Operation and Relationship of Annual Energy Production with Price in Vietnam Competitive Generation Market180 |
| Phan Tran Hong Long, Le Quoc Hung |
| Computation of the Critical Speed of a Rotor Supported by Foil-air Bearings185 Pham Minh Hai, Nguyen Minh Quan |
| Effect of Friction Models on Simulation of Hydraulic Steering System |
| Influence of the Designing Parameters on Flow Fluctuation and Pressure of the Improved Roots Blower196 |
| Nguyen Hong Thai, Tran Ngoc Tien, Phan Tien Dung, Nguyen Quang Huy |
| Constructing Computational Program to Determine Induced Torque Components on Helicopter Main Rotor Rotation Axis204 |
| Nguyen Khanh Chinh, Pham Vu Uy |
| Balance Control Method for UAV Camera Using Zero Velocity Controller210 Nguyen Khac Thap, Nguyen Van Tam, Mac Luu Phong, Pham Van Tien |





| Modified Controls Doubly Fed Induction Generator under Unbalanced Voltage Dip for Reduction of Current Harmonic with PI-ANN Controller214 |
|---|
| Hai Nguyen-Thanh |
| Comparison and Validation of Aerodynamic Prediction using Missile Datcom with CFD and Experimental |
| Le Quoc Dinh, Vu Manh Hieu, Nhu Van Su, Dinh Tien Dung |
| Unsteady Swirl Flow Suppression in the Draft Tube of Francis Hydro Turbine Model by J-Groove225 |
| Young-Do Choi, Zhenmu Chen |
| Suppression of the Swirl Flow in a Draft Tube of a Bulb Turbine Model by Optimum J-Groove Shape232 |
| Viet Luyen Vu, Young-Do Cho |
| Neural Networks Based Control for an Autonomous Underwater Vehicle Equipped with the Collective and Cyclic Pitch Propeller238 |
| Minh Q. Tran, Hung D. Nguyen |
| Quantitative Manoeuvring Characteristics of an Underwater Vehicle Equipped with Collective and Cyclic Pitch Propeller246 |
| Hung D. Nguyen, Arno Dubois, Zhi Q. Leong, Jonathan Binns, Minh Q. Tran |
| Design and Manufacture of Five-hole Air-data Probe: Identification and Calibration Using Least-Squares Method256 |
| Do Cat Tuan, Nguyen Cao Truong Son, Ngo Dinh Tri, Le Thi Minh Nghia |
| Ship Course Control by Integrating Neural Network with Modal Control Technique266 Le Thanh Tung, Hoang Cong Lient |
| The Gas Generator with Two Zones of Fire – mixed Complex in the Liquid Fuel Jet Engine |
| Effect of Runner Blade Density Ratio (I/t) on Energy Characteristics of H-type Darrieus Turbine |
| Nguyen Quoc Tuan, Nguyen The Mich, Vu Van Truong, Do Huy Cuong |
| The Calculation of the Pneumatic System Parametersof a Launcher for High Speed UAV280 |
| Vuona Trung Anh Nauvon Duo Cuona Vu Hoo Pinh Phom Von High Tran Duy Duyor |





| Design Process of a Small-scale Wind Turbine for Water Pumping to Meet Household Needs | 284 |
|---|----------------|
| Ly F | Hung Anh |
| Study on Identifying Several Geometric Parameters of Hydrostatic Spindle Be on External Cylindrical Grinding Machine based on Ability of Manufacturing Technology | Ū |
| Van-Hung Pham,Tuan-Anh Bui,Thuy-Duon | g Nguyen |
| Studying Effects of Extending Forces on the Ship Hull in Maneuvering Vu Van Duy, Pham Ky Quang, Nguyen Thanh Nhat Lai, Nguyan | |
| Impact of Flow Configuration inside Spray Drying Tower on Drying Efficiency Product Quality | |
| Thi Thu Hang Tran, Maciej Jaskulski, Kieu Hiep Le, Evangelos | s Tsotsas |
| A Numerical Investigation on Droplet Formation in Microfluidic Double T-junct under the Effects of Channel Depth | 310 |
| Numerical Study of the Aerodynamic Characteristics and the Equilibrium of Unmanned Aerial Vehicle Regarding the Horizontal Tail Role | |
| Numerical Simulation for Solidification of Water, Molten Silicon, Molten Germa on a Cold Plate | |
| Binh D. Pham, True | ong V. Vu |
| An Adaptive Coupled Level Set/Volume of Fluid Method for Simulation of Mul- Flows on Unstructured Grids | |
| Long Cu Ngo, Hyoung-G | won Cho |
| On Different Forms of Energy Equation in Engineering | 333 Van Que |
| The Flow Behavior of the Gas-Liquid Cylindrical Cyclone (GLCC) Separator we Changing the Different Geometrical Configurations of Inlets | 339 |
| Modeling and Simulating Specialized Vehicle Regenerative Braking System Luyen Van Hieu, Ngo Sy Loc, Tran Khanh Duong, Pham Van Hai, Đong N | |





| Development of a New Side-coil MR Brake Employing Separating Walls between the Coils and MR Fluid |
|---|
| Nguyen Ngọc Diep, Le Dai Hiep, Nguyen Quoc Hung |
| Optimal Design of Wind Turbine Blades using Vortex Theory357 |
| Tran Tien Anh |
| Development of Preliminary Design for Tidal Power Plant at Kuching Barrage368 **Andrew Ragai Henry Rigit, Norman Baggio Anak Francis** |
| A Study of Finite Element Method for Fluid-Structure Interaction on Large Deformation Using Spring Analogy Method and Delaunay Triangulation375 |
| Sang T. Ha, Hieu V. Vu, Hyoung-Gwon Choi |
| Numerical Simulation of Cavitating Flow with Thermodynamic Effects of Cavitation |
| Anh Dinh Le, Yuka Iga |
| Aerodynamic Performances of a Single-stage Transonic Axial Compressor with Blade Design near Stator Hub Surface |
| Tuan-Long Vu, Tan-Hung Dinh, Cong-Truong Dinh |
| Effects of Different Rotors Distance on Aerodynamic Performances of a Multi-rotor Unmanned Aerial Vehicles |
| Cong-Truong Dinh, Dinh-Quy Vu |
| Research on the Star Topology Connection of Multi-PLC for Automation Control397 Vo Nhu Thanh, Tran Ngoc Hai |
| Identification of Aerodynamic Coefficients of Unmanned Aerial Vehicles According to Flight Testing Data |
| Dang Ngoc Thanh, Nguyen Van Thang |
| Modeling the Characteristic Curve of Wind Turbine on Various Pitch Angle and Tip Speed Ratio |
| Phan Tran Hong Long, Ho Ngoc Dung, Ho Sy Mao |
| A Study on Air Flow Through Intake Manifold of an Inline 4 Cyliner Engine410 **Nguyen Phu Thuong Luu** |
| Evaluate Basic Technical Parameters of the Electro-hydraulic Control System of the Ship Steering Gear |
| Le Van Hoc, Nguyen Ngoc Dam |





| Design Control System Using the Sustainable Controller Incorporating Predictive Elements |
|---|
| Nguyen Tien Sang, Le Duc Dung, Pikina Galina Alekceevna, Nguyen Tien Khang |
| Modeling and Simulation Research Position Control of Hydraulic Cylinder using High Speed on/off Valve is based on the Method PWM (Pulse Width Modulation) of Control Pulse426 |
| Do Viet Long, Hoang Sinh Truong, Tran Xuan Bo |
| Investigate Magnetic Field of Dual Halbach Array in Linear Generator using for Wave Energy Conversion |
| Do Huy Diep, Dang The Ba, Nguyen Van Duc |
| Effect of Accommodation and Container on Air Resistance Acting on Hull of the Container Ship437 |
| Ngo Van He, Bui Dinh The |
| Aerodynamic Modeling of a Missile Model using a Semi-Empirical Datasheet Component Build-up Method441 |
| Luu Hong Quan, Le Tran Thanh Hai, Le Doan Quang, Nguyen Phu Hung |
| Research on Modeling Hydraulic System of Working Tool of Hydraulic Excavator by Matlab Simhydraulics |
| Chu Van Dat, Nguyen Tien Khu |
| A Study on Lateral Instability of Tractor Semitrailer Turning Maneuvers on Roads with High Adhesion Coefficient455 |
| Duong Ngoc Khanh, Vo Van Huong, Ta Tuan Hung |
| Simulation of Flow Rate in a Water-in-Glass Evacuated Tube Solar Water Heater460 Van Chuong Ta, Nguyen An Nguyen, Quoc Uy Nguyen |
| Models of High Technology Sea Salt Production by Three-Dimensional Evaporation (E3D) |
| Developing New Design of a Top-lid Updraft Biomass Cookstove by CFD Modeling469 |
| Linh Nguyen Huu, Dung Le Duc |
| Lifting and Discharging the Cassava Roots System for Hydraulic Transmission474 |





| Develop an Immersed Boundary Method Solver in OpenFOAM | 480 |
|---|-------------------|
| Vu Do Quoc, San | g Van Pham |
| A Study on Ions Transports Through Charged Nanopores | 486 |
| Pham Van Sang, Nguy | yen Viet Bac |
| The Expansion of Lean Limit for Direct Injection Natural Gas Engine by Aux Injection | |
| Tran Dang Quoc, J | long Tai Lee |
| Numerical Simulation of a Hydraulic Hoisting Actuator for Flat Gate of Irriga Systems in Simhydraulics | |
| Van-Thuan Truong, Tu | an-Anh Dao |
| Dynamic Simulation of a Underwater Hydraulic Manipulator | |
| Design and Manufacture Constant Volume Combustion Chamber (CVCC) of for Combustion Study | |
| Nguyen Phi Truong, Nguyen Tuan Nghia, L | e Anh Tuan |
| Discontinuous Galerkin for Advection-Diffusion Equation by Combining Red based Scheme and Interface-Centered Binary-Reconstruction Scheme | |
| Loc H. Khieu, E | ric Johnser |
| Study on Optimization of Moringa Oleifera Leaveshammer Mill | |
| Study on Computation of Aerodynamic Force Acting on Bus in Crosswind C by Using CFD | Conditions |
| Do Tien Quyet, Nguyen Trong Hoan, Trinh | Minh Hoang |
| Numerical and Experimental Investigation of Cavitation Instabilities in Turbo | |
| | Yuka Iga |
| Coefficient Diagram Method for Velocity Control of Hydraulic Motors | |
| | ng Hieu Ngo |
| Improve Intake Port/Valve of RV165-2 Engine by Simulation Method Le Viet Hung, Do Van Dung, Ngu | |
| Study on the effect of solid phase in solid-liquid two phase mixture on work of centrifuge feed pump systems at the coal processing plants in Quang Nii Vu Nam Ngan, V | ing mode nh544 |

xii



| A Validation Study of an Iso-surface based VOF Technique in OpenFOAM® for Sloshing Problem548 |
|--|
| Jiwon Choi, Kyoungsik Chang, Sang-Wook Lee, Geon-Hong Kim |
| Effects of Configurative Parameters on the Dynamic Stiffness and Stability of Pneumatic Vibration Isolation Model552 |
| N.Y.P. Vo, M.K. Nguyen, T.D. Le |
| Disturbance Observer Based Adaptive Sliding Mode Control and Its Application to a Self-balance Dual-arm Field Robot558 **Hoang Son, Dian Songyi, Duong Van Tai** |
| A Numerical Study on Transitional Flow over Aerospatiale A-airfoil Using DDES/IDDES567 |
| Gabin Lee, Kyongsik Chang, Sang-Wook Lee, Geon-Hong Kim |
| Effects of the Spanwise Length of Computational Domain on LES based Airfoil Noise Prediction571 |
| GyeongBo Kim, Kyoungsik Chang, Sang-Wook Lee, Geon-Hong Kim, Byeong Cheon Kim |
| Pressure Wave Propagation in Porous Structure Saturated with Water and Methane Bubbles574 |
| A. A. Gubaidullin, O. Yu. Boldyreva, Duong Ngoc Hai, D. N. Dudko, N. G. Musakaev, Nguyen Tat Thang, Nguyen Quang Thai |
| Modified Controls Doubly Fed Induction Generator under Unbalanced Voltage Dip for Reduction of Current Harmonic with PI-ANN Controller578 |
| Hai Nguyen-Thanh |
| Evaluating the Ability of Salinity Intrusion Prevention for Tam Ky River of Phu Ninh Reservoir585 |
| Cuong T. Nguyen, Kien C. Nguyen, Phuong T. T. Phan, Son T. Hoang |
| Researching on Developing the Decision Support System for Salinity Control Operation and Management in Vu Gia – Thu Bon River Basin590 Son T. Hoang, Lam X. Nguyen, Trinh D. Tran, Son T. Nguyen, Phuong T. T. Phan, Cuong T. Nguyen |
| Numerical Simulation of the Contra-Rotating Propeller by using Ansys CFX597 |
| Vu Pham Duc Dung, Tran Tien Anh |
| Development and Application of a Simulation Model for Intermittent Gas Lift Method in Petroleum Production606 |
| Le Quoc Trung, Nguyen The Duc |





| Study on the Parameterized Three-dimensional Models of Different Shifted Helical Gear Pairs614 |
|--|
| Truong Duc Phuc |
| An Approach to Analyze the Threshold Stability of Internal Gear Motors and Pumps622 |
| Trong Hoa Pham, Toan Thang Le, Wenming Cheng, Van Trung Vu, Anh Ngoc Nguyen, Thuy Chi Nguyen |
| Research Results of Design, Manufacture and Testing of Horizontal Axial Flow Submersible Pump (Capsule Type) for Irrigation, Drainage in Agriculture and Preventing Local Flooding |
| Nguyen Minh Tuan, Nguyen Van Bay |
| Aeromechanic Performance of a Single-stage Transonic Axial Compressor using Bleeding Airflow634 |
| Cong-Truong Dinh, Dinh-Quy Vu, Xuan-Truong Le, Duc-Hai Nguyen |
| Simulation Dynamic System Electric Powertrain using in the Automobile642 **Quang Thanh Nguyen** |
| Simulation of Pitch-roll-yaw Vibrations of Vehicle using Matlab Simulink647 **Quang Thanh Nguyen** |
| Two Advanced Non-Intrusive Methods for Velocity Distribution Measurement in Fluid Mechanics with Some Recent Research and Development |
| A Solution for Measuring the Oil Film Temperature of the Connecting-rod Big End Bearing in the Experimental Device |
| Tran Thi Thanh Hai, Pham Trung Thien, Luu Trong Thuan |
| Aeroacoustics Analysis of Main Rotor of Helicopter UAV |
| Modelling of Thermal Behavior of Thermosyphon |
| Some Aspects of Cavitation Around a Triangular Cavitator with Curved Sides678 Pham Van Duyen, Nguyen Quang Huy, Hoang T. Hong Minh, Vu Van Duy, Truong Viet Anh |
| Author Index 683 |





Evaluating the Ability of Salinity Intrusion Prevention for Tam Ky River of Phu Ninh Reservoir

Cuong T. Nguyen^{1,*}, Kien C. Nguyen¹, Phuong T. T. Phan², Son T. Hoang³

¹ Institute of Mechancics, Vietnam Academy of Science and Technology
² National University of Civil Engineering
³ Institute of Geography, Vietnam Academy of Science and Technology, Vietnam
*Email: ntcuong@imech.vast.vn

Abstract

TamKy river is one of three river systems in Quang Nam province. Being a small river, however it takes an important role in the economic development of Tam Ky city and Quang Nam province in general. Due to the impact of climate change, the flow of the river has been decreasing and partly influenced by the deterioration of Phu Ninh reservoir. This makes the salinity intrusion of this river get worse. In this study, we use MIKE21 software to set up a 2D hydraulic model to simulate the flow in Tam Ky river. After calibratingby the real database, it is shown that the model is able to simulate the flow regime and salinity changes in Tam Ky river very well. Based on the model that has been set, we calculate many salinity washing options of Phu Ninh reservoir with different discharge flows then identify the required discharge rate of 26m³/s, 30m³/s and 37 m³/s corresponding to the flow in Tam Ky River at high, medium and low level compared to average flow in dry season.

Keywords: Tam Ky River, MIKE21, Salinization, Estuary, Reservoirs Operating.

1. Introduction

Quang Nam has three main river systems: Vu Gia, Thu Bon and Tam Ky. The Vu Gia and Thu Bon Rivers are connected to form a complex river system. This river system has also received special attention from both management agencies as well as scientists due to the increasing problems of landslide, erosion, accretion and flooding. Meanwhile, Tam Ky river is smaller but directly influences Tam Ky city, the capital of Quang Nam province. It has not encountered problems with sedimentation of estuaries, river bank slides but faced another problem which is salinity intrusion, especially since Phu Ninh reservoir blocked the river to move water up north for irrigation. The location of Tam Ky city and Phu Ninh reservoir in Tam Ky basin is clearly shown in Figure 1. So far, little research has been done on this river. The studies have still mainly focused on the flood season and the flooding problems of the river downstream. Representatively, a study by Nguyen Ngoc Quynh (2015) suggested a toolset for flood forecasting, reservoir management and flood management in Tam Ky river basin. There are also some studies on salinity intrusion such as "The summary report on the irrigation planning of Quang Nam province to 2020 with orientation towards 2050" and in "Project on adjustment of general planning of Tam Ky city to 2030 with a vision to 2030". However, these studies just simply used one dimensional model (1D) and there was no comparative evaluation with actual measurements. Therefore, the results are mainly qualitative and using for building plans rather than quantitative reliability.

So, in this study, we set up a 2D model to study the flow regime and salinity intrusion of this river.



Fig. 1. Tam Ky River Network (source from Google).

Moreover, in this study we use the 2D model, which was established and verified, to determine the required discharge flow of Phu Ninh reservoir to prevent salinization in downstream areas. This is an urgent problem in reality to solve because since Phu Ninh reservoir was built, salinity intrusion has been more and more serious. Meanwhile, Phu Ninh reservoir was designed to have function against salinity intrusion and in 2012, Phu Ninh reservoir was tested the flushing to clean salty water for downstream but not effectively.





2. Inputs for the models

In the 2D model for flow simulation in dry season, the inputs consist of the following componants: riverbed terrain, upstream and lowerstream boundary data, real measured data and some other information.

In this work, we inherited the measured databases from the project invested by Quang Nam province which include all the data of TamKy river's riverbed terrain, part of TruongGiang river that connect to TamKy river and the estuary as shown in Fig.2 below.



Fig. 2. Riverbed tarrain and entuary data measured in 2017.

The upperbound of the river system is the hourly real measured data at the required areas such as: Bau Ven, Truong Chi, Da Giang, Phu Ninh, Tam Tien. The lowerbound data is the hourly real measured water level at required areas including Cua Lo and Dong Thanh.

3. Set up and adjust the model

Based on the available data, our research group has set up two models which are 1D hydraulic model MIKE11 and 2D spreading model MIKE21. The 1D hydraulic model is used to mathematically simulate the flow on the river and calculate the inflow at the upper bound for the 2D spreading model MIKE21.

From the hydraulic diagram and the terrain maps of the basin, we processed the data and mapped into the network of rivers and streams in the MIKE11 model which consists of 88 cross sections. The upper bound includes Phu Ninh, Tam Tien, Truong Chi, Da Giang and Bau Ven. The lowerbound is Hoa An entuary and Cua Lo entuary as shown in Figure 3 below.

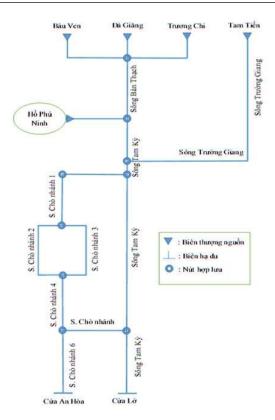


Fig. 3. 1D hydraulic diagram MIKE11 for Tam Ky

Based on the riverbed terrain data, The 2D spreading model MIKE21 has been set as the Figure 4 below.




Fig. 4. Diagram using 2D spreading MIKE21.








Fig. 5. Unstructured grid using in 2D model.

Because of the small terrain and the large depth of the study area, the simulating the hydraulic and pollution spreading processes is quite complex. The hydrodynamic model for Tam Ky basin uses an unstructured grid (as in Figure 5) with a total of 8088 triangles computed from 4889 nodes, the largest triangle has the area of 10000m^2 .

The dataset from 7/3/2001 to 18/3/2001 is used to adjust the model. Using the upper and lower bounds as real measured data, the model is calibrated by the water levels and the salnility at TamAnh station. In Fig.6 and Fig.7, the model calibration get the results closest to the water level and salinity that real measured at TamAnh station.

In Fig.6, The water level at TamAnh station oscillates synchronously with the obserbed data which is shown that the 2D model calculates the water level quite well. The calculated peak and tidal values are lower than the real ones. However, the differences are small and acceptable.




Fig. 6. The obserbed and calculaed water level at TamAnh Station from 11/8/2001 to 23/8/2001.




Fig. 7. Salinization at Tam Anh station from 11/8/2001 to 23/8/2001.

The 2D model also give good calculated and adjusted results at salinization. The differences to TamAnh station data are quite small. This is clearly shown in Fig.7.

4. Verification and application of numerical models to determine the effective discharge flow of Phu Ninh reservoir to wash salinity

After calibrating the model, the research team obtained a set of parameters which is now sufficiently reliable to calculate the scenarios. To confirm the reliability of the model, we used this set of parameters including the flow and the water level at the corresponding boundary as the calibration plans from 8/3/2017 to 19/3/2017 to verify the real data in 2017.

The result of water levels at Tam Anh station is shown on Fig.8. It have an NSE target of 0.75. This is a good result in the evaluation scale of this standard.




Fig. 8. Calculated and measured water levels at TamAnh station in 2017.





The target for evaluating the calculated and measured results is the NSE (Nash-Sutcliffe Efficiency) which is calculated according to Function 1 below.

$$NSE = 1 - \frac{\sum_{i=1}^{N} (Q_{id,i} - Q_{u,i})^{2}}{\sum_{i=1}^{N} (Q_{id,i} - \overline{Q}_{d})^{2}}$$
(1)

where:

Qtd,i: Real measured value of the flow at time i,

Qtt,i: Calculated value of the flow at time i,

 $\overline{\mathcal{Q}_d}$: Average of real measured values of the flow,

N: The total number of the values in the string

Fig. 9 and Fig. 10 below are the calculated results of 2D model on all the river network.




Fig. 9. Result at the water level in the whole region at 5pm on 11/11/2001.




Fig. 10. Result of salinity sprea across the whole region at 2pm on 9/11/2001.

The established and verified model is used to calculate three options of upperbounds of Tam Ky river as follow:

- **Option 1**: the inflows into these upperbounds are stable and larger than the average flow in the dry season of many years.

- **Option 2**: the inflows into these upperbounds are stable and equal to the average flow in the dry season of many years.
- **Option 3**: the inflows into these upperbounds are stable and less than the average flow in the dry season of many years. (4.1)

The boundary values (which is the discharge flows) of Phu Ninh reservoir will be adjusted by these options to get the salinity at the junction near Truong Giang river less than 4 per thousand (which does not effect to the agricultural activities). With many calculation, the final option to get the minimum dischages is determined as in Table 1 below.

Table 1. Results of three options

| No. | Upperbound compared to the average flow in dry season of many years | Required discharge flow of Phu Ninh reservoir (m³/s) |
|-----|--|---|
| 1 | Inflows are larger (than the average flow in the dry season of many years) | 37 m³/s |
| 2 | Inflows are equal | $30 \text{ m}^3/\text{s}$ |
| 3 | Inflows are less | 26 m³/s |

5. Conclusions

In this work, the 2D model MIKE21 is established to simulate the flow regime and the process of the salinity intrusion of Tam Ky river in the dry season. The riverbed terrain data and some other data are remeadsured and synchronized. The results of the model are quite consistent with the real data.

Using the result of the model to calculate the discharge plan for Phu Ninh reservoir in oder to wash the salnility of Tam Ky river shows that: The required discharge flow of Phu Ninh reservoir must be quite large to ensure that the Agricultural activities will not be effected by the salility of Tam Ky river (salinity less than 4 per thousand). They are 26m³/s, 30m³/s and 37 m³/s, corresponding to the high, medium and low level of the flow in Tam Ky river compared to the average anual flow. This also explains why Phu Ninh reservoir discharged 20 milliions m³ in 2012 but salinity washing was not effective.

This result also show that the amount water for salinity washing takes a large volumme of the reservoir, which makes the ability of salinity washing





of the reservoir is uneffective. Therefore, it is nescessary to continue researching to find other solution in exploiting and using the water amount of Phu Ninh reservoir for salinity washing and irrigation of the downstream area in the most effective way, such as: allowing salinity intrusion deeperly into Tam Ky river, building a dam to prevent salinity at a appropriate area, or pumping fresh water on the surface into fields, etc.

Acknowledgments

The first author would like to thank for financial support of Vietnam National Foundation for Science and Technology Development (NAFOSTED) under grant number 107.03-2017.12.

References

[1] Nguyễn Ngọc Quỳnh: Kết quả nghiên cứu đề xuất bộ công cụ dự báo lũ, điều hành hồ chứa và quản lý ngập lụt hạ du cho lưu vực sông Tam Kỳ, tỉnh Quảng Nam, Tạp chí khoa học và công nghệ thủy lợi số 28 (2015).

- [2] Ngô Lê An, Nguyễn Ngọc Hoa (2013): Nghiên cứu dự báo dòng chảy lũ lưu vực sông Vu Gia-Thu Bồn, Tạp chí Khoa học kỹ thuật thủy lợi và môi trường, số 43 (2013).
- [3] Báo cáo tóm tắt quy hoạch thủy lợi tỉnh Quảng Nam đến năm 2020 định hướng tới năm 2050.
- [4] Đề án điều chỉnh quy hoạch chung thành phố Tam Kỳ đến năm 2030, tầm nhìn đến năm 2030.
- [5] NGUYEN Tien Cuong, TRINH Thu Phuong (2008): Forecasting the discharge into Hoa Binh reservoir by applying the Connecting model MARINE-IMech1D, Vietnam Journal of Mechanics, 30 (3), 149-157.
- [6] H Van Lai, N Van Diep, NT Cuong, NH Phong: Coupling hydrological-hydraulic models for extreme flood simulating and forecasting on the North Central Coast of Vietnam, WIT Transactions on Ecology and the Environment 124, 113-123.
- [7] DHI software (2014), MIKE 11 A modelling system for River and channels, User Guide.
- [8] DHI software (2014), MIKE 11 A modelling system for River and channels, Reference Manual.





PROCEEDINGS

The First International Conference on Fluid Machinery and Automation Systems ICFMAS2018

Bach Khoa Publishing House, Hanoi 1 – Dai Co Viet – Hanoi Tel. (84.24) 3868 4569; Fax. (84.24) 3868 4570 http://nxbbk.hust.edu.vn

____***____

Responsible for Publication

Director – Editor-in-Chief: Dr. Bui Duc Hung

Editor: Dr. Vu Van Truong, Do Thanh Thuy

Book designer: Dr. Vu Van Truong

Vu Thi Hang, Nguyen Thi Thu

Cover designer: Duong Hoang Anh

Printed at: Tandaiviet Printing and Office Services Joint Stock Company, 16 Chua Lang

Street, Dong Da District, Hanoi.

Quantity: 140 copies. Size: (21×29.7) cm.

Registration No.: 3467-2018/CXBIPH/02-80/BKHN; ISBN: 978-604-95-0609-3.

Decision publish No.: 212/QĐ-ĐHBK-BKHN, 24/10/2018.

Archived: IV/2018.